

EPD200A

380 TVL Indoor Pendant Color Dome Camera




Features

- 1/3" Sony Super HAD CCD with the light sensitivity of 0.3 Lux/F=1.2
- Designed with the advanced DSP for excellent picture quality and performance
- Electronic shutter and AGC allows the camera to be operated in environment with various light levels
- BLC and AGC function with On/Off switchable
- Manual zoom lens for adjustable viewing range
- Pendant mount design for ceiling installation

Specifications

Pickup Device	1/3" Sony Interline Transfer Super HAD CCD
Video Format	NTSC or PAL
Picture Format	510 x 492 (NTSC) / 500 x 582 (PAL)
Horizontal Resolution	380 TVL
Video Output	BNC 1.0 Vp-p, 75 ohm
Sensitivity	0.3 Lux/F=1.2
S/N Ratio	Over 48dB (AGC On)
Electronic Shutter	1/50 (1/60) ~ 1/100,000 sec.
Sync. Mode	Internal Sync.
Backlight Comp.	On/Off switch
Auto Gain Control	On/Off switch
Auto White Balance	Yes
Flickerless	On/Off switch
Gamma Correction	0.45
Lens	Built-in vari-focal f=3.8~9mm/F=1.2
Power Source	12VDC / 24VAC
Power Consumption	3W max.
Dimensions (W x H)	130 mm / 5.1"
Weight	0.27 kg / 0.6 lbs
Operating Temp.	0°C ~ 50°C / 32°F ~ 122°F
Humidity	20% ~ 80% humidity

Dimensions

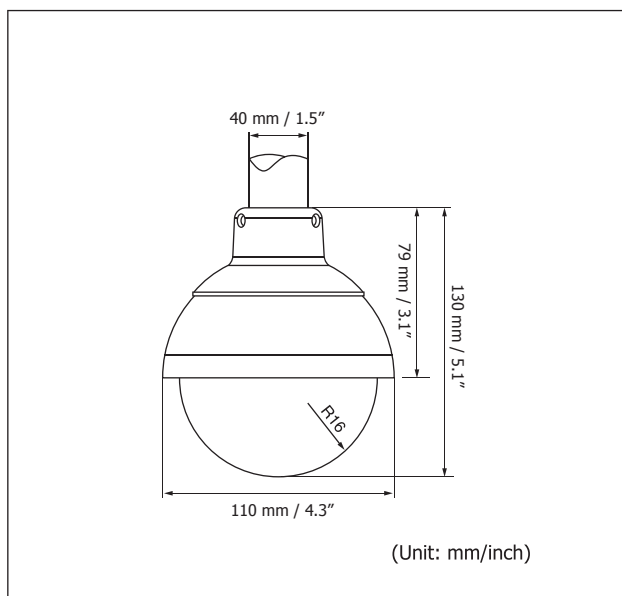

Ordering Information

- **EPD200A:** Indoor Pendant Color Dome Camera, 380 TVL, 3.8~9mm lens, Dual Voltage, Smoke Cover Shell